


FIND EMERGENCY SIGN LIGHT TWSA392WA

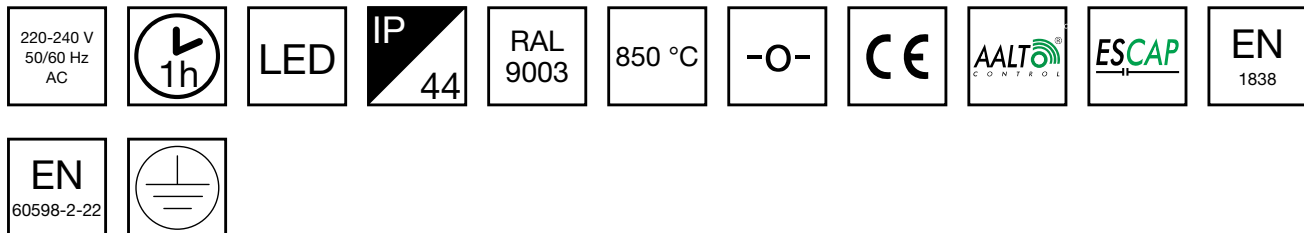

Self-contained ESCAP emergency sign with 1 h super capacitor and Aalto Ctrl wireless monitoring.

Teknoware Find is an emergency sign light that guides you to the location of fire and safety equipment. Find indicates the equipment below the light, and it has a downlight which illuminates the equipment during power outages. There are several standard pictograms, and custom-made pictograms are available on demand. The Find's frame is powder-coated steel and it has an IP44-rating.

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 20, 2024 | Source:
www.teknoware.com/en/emergency-lighting/find-emergency-sign-light-twsa392wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



Product Code	TWSA392WA
Feature	Aalto Control, Escap
Mounting (standard)	wall
Customs Code	94056080
GTIN Code	6438045024639
ETIM Product Class	EC001957
Length	300 mm
Width	180 mm
Height	120 mm
Weight	1,7 kg
Backup	1 h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP44
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	metal
Colour	RAL9003
Electrical Installation	3 x 2,5 mm ²
Luminous Flux	24 lm

Downlight chart for Exit Lights

Tables of 1 lux and 0,5 lux, under the Exit Light.
Level of measurement 0,02 m, measurement result with battery operation.



R1 distance from wall (X axis)
R4 distance from wall (Y axis)




TWSA392WA

Mounting height (m)	Below the light lux	R1 (m)	R4 (m)	R1 (m)	R4 (m)
		1 lux	1 lux	0,5 lux	0,5 lux
2	9	1	1	1,2	1,2
2,5	5,5	1,1	1,1	1,4	1,3
3	3,5	1,2	1,1	1,5	1,3
4	2	1,3	1,1	1,6	1,5

ONE OR MORE OF THESE IS ALSO REQUIRED:

PICTOGRAMS FOR EMERGENCY EXIT
LIGHTS






Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PBA3E003		30	Find Emergency Sign Light
PBA3E004		30	Find Emergency Sign Light
PBA3E010		30	Find Emergency Sign Light

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 20, 2024 | Source:
www.teknoware.com/en/emergency-lighting/find-emergency-sign-light-twsa392wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com






Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PBA3E012		30	Find Emergency Sign Light
PBA3F001		30	Find Emergency Sign Light
PBA3F002		30	Find Emergency Sign Light

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 20, 2024 | Source:
www.teknoware.com/en/emergency-lighting/find-emergency-sign-light-twsa392wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PBA3F005		30	Find Emergency Sign Light
PBA3F006		30	Find Emergency Sign Light

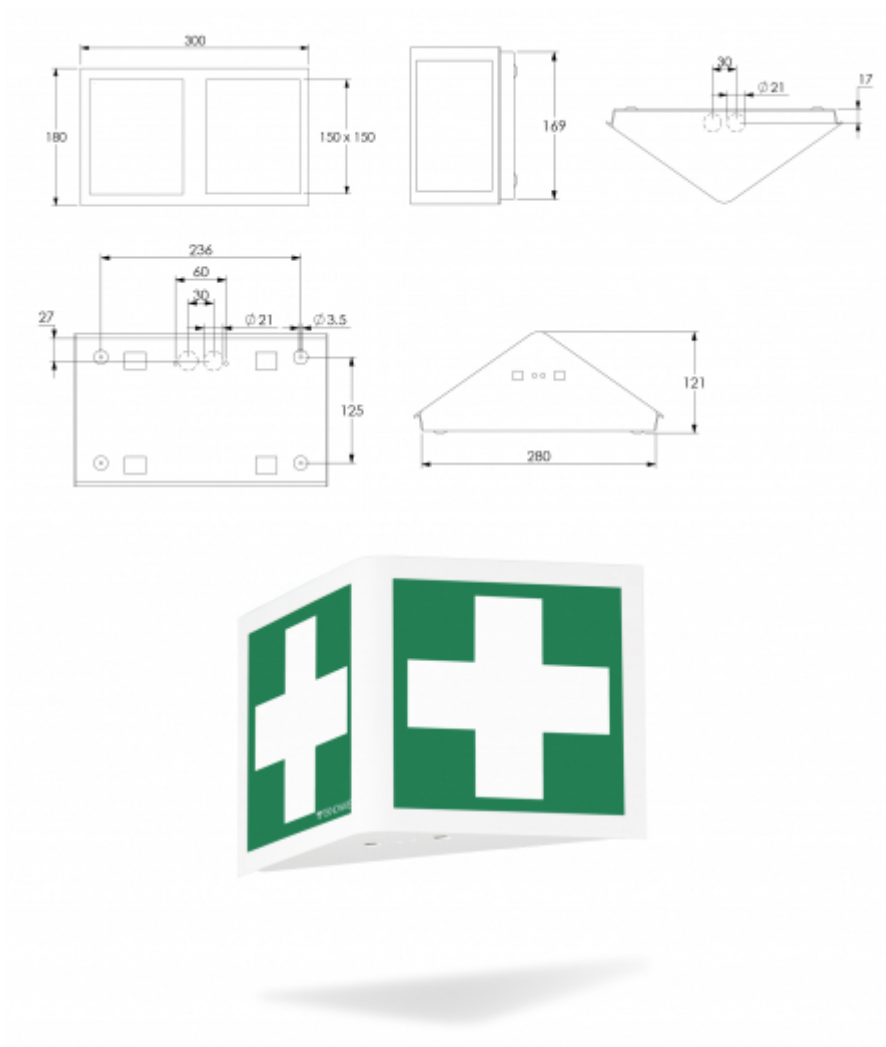

We reserve the rights to make modifications without notice.
 Copyright © 2024 Teknoware. All rights reserved.
 Date: May 20, 2024 | Source:
www.teknoware.com/en/emergency-lighting/find-emergency-sign-light-twsa392wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
 Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

