


SMOOTH ZONE EMERGENCY LIGHT TWSA892WA

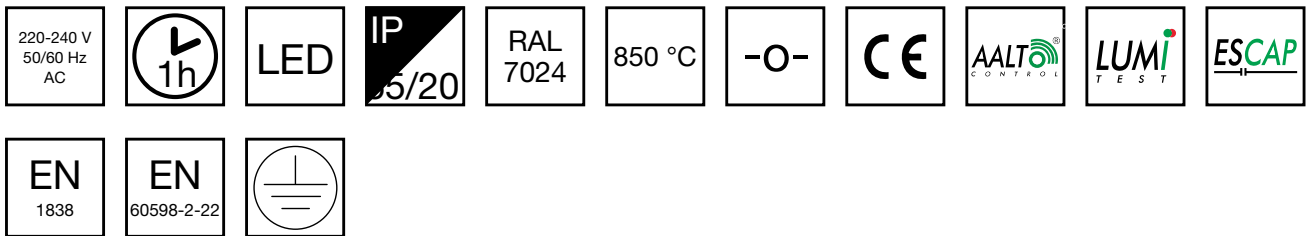

Self-contained Escap Emergency light with 1 h super capacitor and wireless central monitoring

Teknoware Smooth is a small and elegant yet extremely durable emergency light optimised for outdoor use. The Smooth is a combination light, which you can use both as an emergency light and as a 300 lumen general light. Because of the stylish design, the luminaire blends seamlessly into the architecture of the building. The Smooth always consists of two units: the luminaire and a separated indoor electronic unit. The Smooth includes a 5-metre fire-proof installation cable between the units. The luminaire is designed for surface mounting on a wall. The Smooth has an impact-resistant cast aluminium casing (IK10), and it is dust- and waterproof (IP65 for the visible part of the luminaire). The standard colour of the luminaire is graphite grey (RAL 7024), other colours are available on request (e.g. white RAL 9003).

The Smooth Zone is a compact emergency light designed to illuminate open areas efficiently. The luminaire provides a broad, even pattern.

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 20, 2024 | Source:
www.teknoware.com/en/smooth-zone-emergency-light-twsa892wa


Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



| | |
|-------------------------------------|---------------------------------|
| Product Code | TWSA892WA |
| Feature | Aalto Control, Escap, Lumi Test |
| Mounting (standard) | wall |
| Customs Code | 94056080 |
| GTIN Code | 6438045025995 |
| ETIM Product Class | EC001957 |
| Length | 100 mm |
| Width | 60 mm |
| Height | 110 mm |
| Weight | 1.4 kg |
| Backup | 1 h |
| Max Input Power VA | 11 VA / 3 VA |
| Nominal Supply Voltage | 220-240 V, 50/60 Hz AC |
| Protection Class | I |
| IP Class | IP65/IP20 |
| Temperature Range Min - Max | -25...+35 °C |
| Glow Wire Test of Plastic Materials | 850 °C |
| Light Source | LED |
| Body Material | cast aluminium |
| Colour | RAL7024 |
| Electrical Installation | 3/4 x 2,5 mm ² |
| Luminous Flux | 32 lm |

Wall mounting

Tables of 1 lux and 0,5 lux, under the Emergency Light.
Level of measurement 0,02 m, measurement result with battery operation.

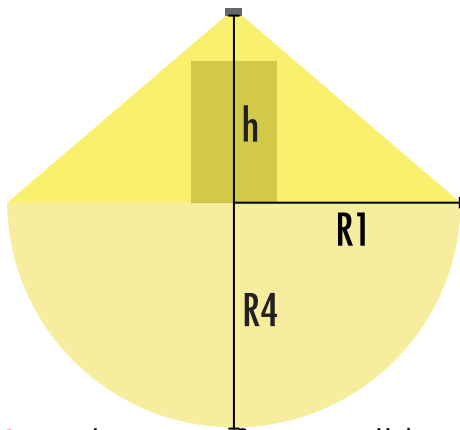

R1 distance from wall (X axis)
 R4 distance from wall (Y axis)


TWSA892WA

| Mounting height (m) | Below the light lux | R1 (m) | R4 (m) | R1 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|---------|---------|
| | | 1 lux | 1 lux | 0,5 lux | 0,5 lux |
| 2,5 | 9 | 1.4 | 3 | 1.6 | 3.2 |
| 3 | 6 | 1.5 | 3.1 | 1.8 | 3.5 |

OPTIONAL ACCESSORIES:

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

| Product Code | Product Name | Compatible Product Groups |
|--------------|---|----------------------------|
| XWTA810 | Smooth surface mounting bracket XWTA810 | Smooth: Zone, Smooth: Line |

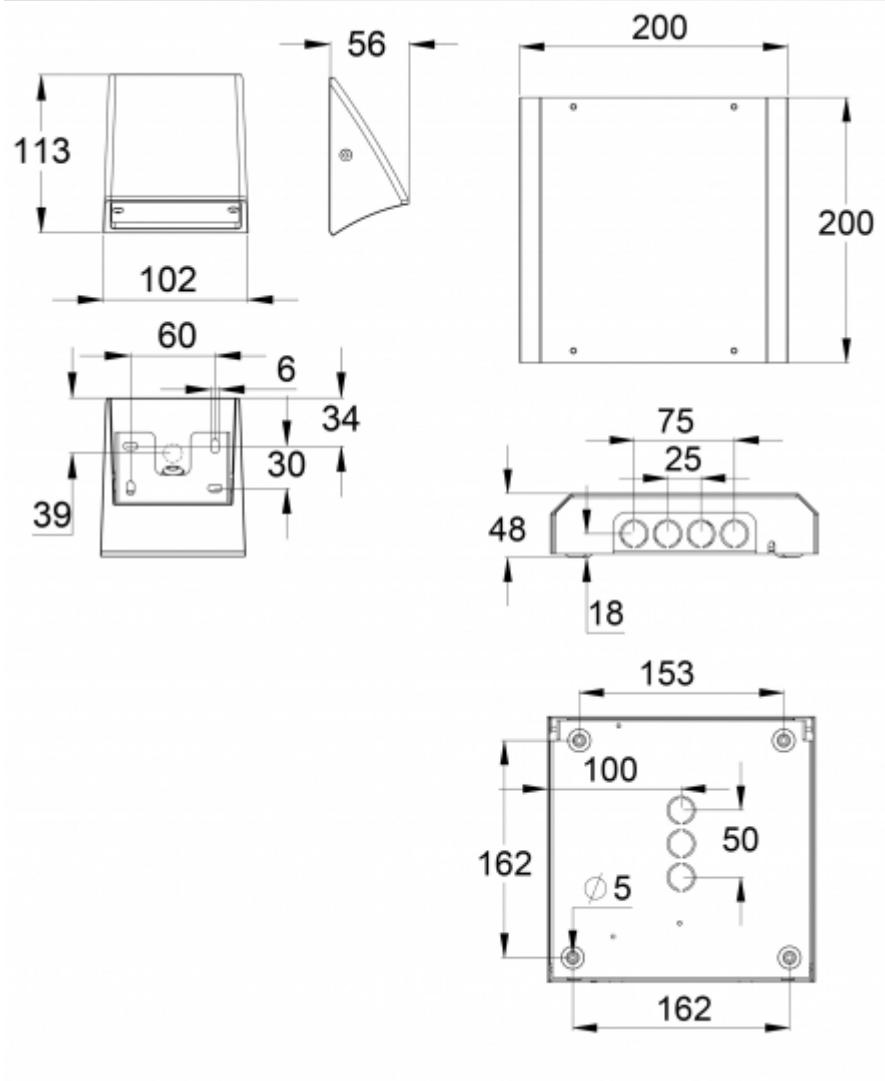

We reserve the rights to make modifications without notice.
 Copyright © 2024 Teknoware. All rights reserved.
 Date: May 20, 2024 | Source:
www.teknoware.com/en/smooth-zone-emergency-light-twsa892wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
 Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

