


# STEEL EMERGENCY EXIT LIGHT TWSE592WA

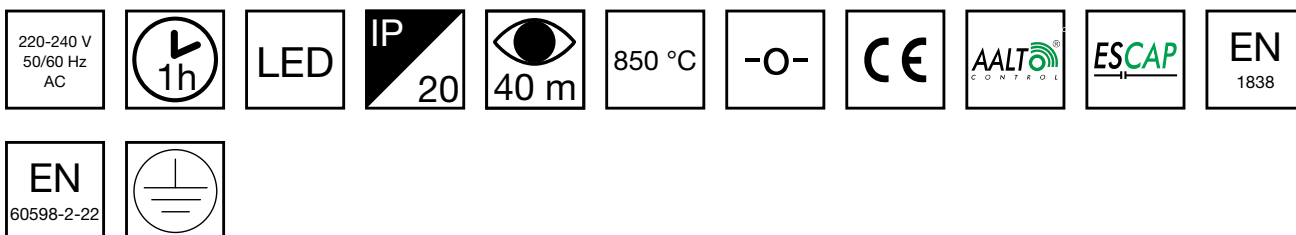

Self-contained emergency exit light with 1 h supercapacitor, wireless central monitoring and self-testing feature

Teknoware Steel is an elegant emergency exit light for high-class premises. The light plate in the elegant luminaire has a narrow, glossy metal frame. The luminaire can be used as one or

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: April 28, 2024 | Source: [www.teknoware.fi/en/steel-emergency-exit-light-twse592wa](http://www.teknoware.fi/en/steel-emergency-exit-light-twse592wa)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



two sided, and depending on the model, it is suitable for ceiling, wall, suspension or flag mounting. The Escap models have an extended ten-year product warranty.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: April 28, 2024 | Source: [www.teknoware.fi/en/steel-emergency-exit-light-twse592wa](http://www.teknoware.fi/en/steel-emergency-exit-light-twse592wa)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



|                                     |                         |
|-------------------------------------|-------------------------|
| Product Code                        | TWSE592WA               |
| Feature                             | Aalto Control, Escap    |
| Mounting (standard)                 | ceiling, cable, surface |
| Customs Code                        | 94056080                |
| GTIN Code                           | 6438045027753           |
| ETIM Product Class                  | EC001957                |
| Length                              | 451 mm                  |
| Width                               | 53 mm                   |
| Height                              | 378 - 2278 mm           |
| Weight                              | 2.9 kg                  |
| Backup                              | 1 h                     |
| Max Input Power VA                  | 4,1 VA                  |
| Max Input Power W                   | 3,8 W                   |
| Nominal Supply Voltage              | 220-240 V, 50/60 Hz AC  |
| Protection Class                    | I                       |
| IP Class                            | IP20                    |
| Temperature Range Min - Max         | -25...+35 °C            |
| Glow Wire Test of Plastic Materials | 850 °C                  |
| Viewing Distance                    | 40 m                    |
| Light Source                        | LED                     |
| Body Material                       | stainless steel plate   |
| Electrical Installation             | 3 x 2,5 mm <sup>2</sup> |


ONE OR MORE OF THESE IS ALSO REQUIRED:

## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



| Product Code | Pictogram                                                                           | Viewing Distance (m) | Compatible Product Groups  |
|--------------|-------------------------------------------------------------------------------------|----------------------|----------------------------|
| PBVEX401E    |  | 40                   | Steel emergency exit light |

| Product Code | Pictogram                                                                                                                                                           | Viewing Distance (m) | Compatible Product Groups  |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------|
| PBVEX401E1   |                                                                                    | 40                   | Steel emergency exit light |
| PBVEX401E2   |                                                                                    | 40                   | Steel emergency exit light |
| PBVEX402E    |   | 40                   | Steel emergency exit light |
| PBVEX402E3   |                                                                                    | 40                   | Steel emergency exit light |
| PBVEX405E    |   | 40                   | Steel emergency exit light |
| PBVEX405E3   |                                                                                    | 40                   | Steel emergency exit light |

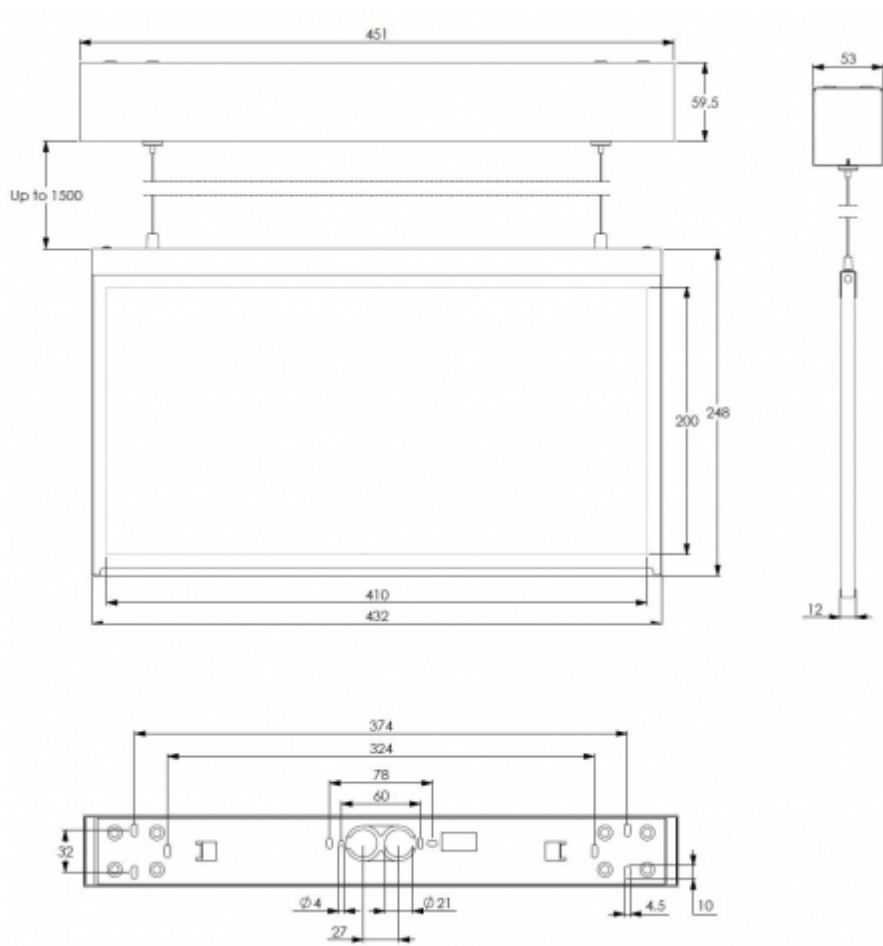

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: April 28, 2024 | Source: [www.teknoware.fi/en/steel-emergency-exit-light-twse592wa](http://www.teknoware.fi/en/steel-emergency-exit-light-twse592wa)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

 **TEKNOWARE®**