


# ROBUST 95 LED EMERGENCY LIGHT TWT9551WK



## Addressable 230 V centrally supplied LED emergency light

Robust 95 is a LED emergency light for surface mounting to the wall. It has an especially robust design and a metal body.

With their high IP class and a very rugged construction, the luminaires are suitable for demanding environments, such as damp locations, industry and tunnels.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 17, 2024 | Source:

[www.teknoware.fi/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk](http://www.teknoware.fi/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



|                                     |                            |
|-------------------------------------|----------------------------|
| Product Code                        | TWT9551WK                  |
| Feature                             | Tapsa Control              |
| Mounting (standard)                 | surface                    |
| Customs Code                        | 94056080                   |
| GTIN Code                           | 6438045022963              |
| ETIM Product Class                  | EC001957                   |
| Length                              | 304 mm                     |
| Width                               | 126 mm                     |
| Height                              | 126 mm                     |
| Weight                              | 1,3 kg                     |
| Max Input Power VA                  | 10 VA                      |
| Max Input Power W                   | 5,5 W                      |
| Nominal Supply Voltage              | 220-240 V, 50/60 Hz AC, DC |
| Protection Class                    | I                          |
| IP Class                            | IP67                       |
| Temperature Range Min - Max         | -30...+50 °C               |
| Glow Wire Test of Plastic Materials | 650 °C                     |
| Light Source                        | LED                        |
| Body Material                       | metal                      |
| Electrical Installation             | 3 x 2,5 mm <sup>2</sup>    |
| Luminous Flux                       | 160 lm                     |

## Emergency lighting for escape routes (wall mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.


Date: May 17, 2024 | Source:

[www.teknoware.fi/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk](http://www.teknoware.fi/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



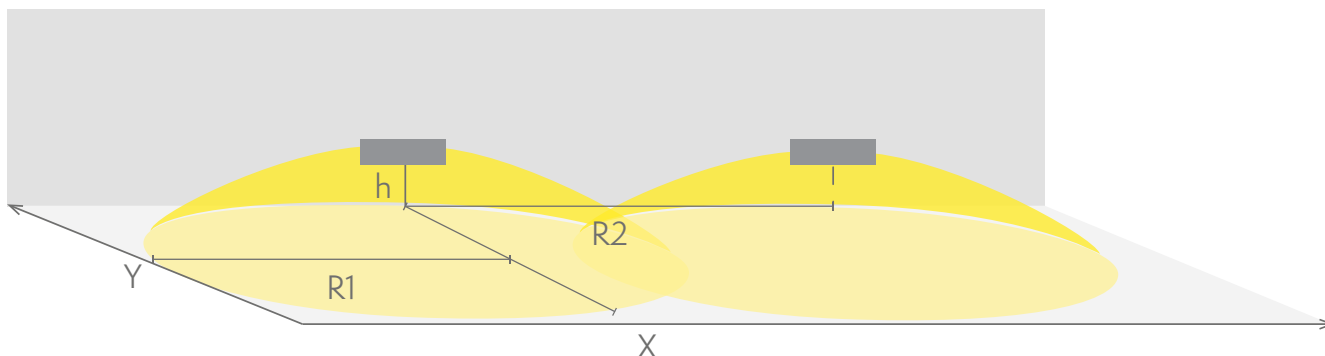

R1 distance from wall (X axis)  
 R2 installation distance between lights (X axis)  
**TWT9551WK**




| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) |
|---------------------|---------------------|--------|--------|
|                     |                     | 1 lux  | 1 lux  |
| 0,625               | 100                 | 3,5    | 8      |

## SPARE PARTS:

## SPARE PARTS FOR EMERGENCY LIGHTS



| Product Code | Product Name    | Compatible Product Groups                                                                                         |
|--------------|-----------------|-------------------------------------------------------------------------------------------------------------------|
| W100006      | Ballast W100006 | Addressable 230 V Centrally Supplied Emergency Exit Lights, Addressable 230 V Centrally Supplied Emergency Lights |

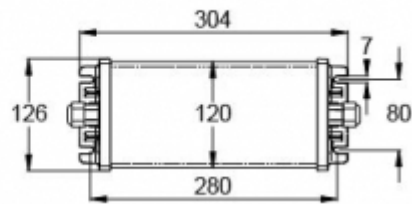

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 17, 2024 | Source:

[www.teknoware.fi/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk](http://www.teknoware.fi/en/emergency-lighting/robust-95-led-emergency-light-twt9551wk)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

