









STEEL EMERGENCY EXIT LIGHT TWTE651WK



Addressable 230 V centrally supplied emergency exit light

Teknoware Steel is an elegant emergency exit light for high-class premises. The light plate in the elegant luminaire has a narrow, glossy metal frame. The luminaire can be used as one or two sided, and depending on the model, it is suitable for ceiling, wall, suspension or flag mounting.

Product Code	TWTE651WK
Feature	Intelligent Controller, Tapsa Control
Mounting (standard)	ceiling, surface
Mounting (optional)	flag
Customs Code	94056080
GTIN Code	06438045028316
ETIM Product Class	EC001957
Length	451 mm
Width	53 mm
Height	388 mm
Weight	3.4 kg
Max Input Power VA	9,1 VA
Max Input Power W	5,1 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	60 m
Light Source	LED
Body Material	stainless steel plate
Electrical Installation	3 x 2,5 mm ²


ONE OR MORE OF THESE IS ALSO REQUIRED:

PICTOGRAMS FOR EMERGENCY EXIT LIGHTS



Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PBVEX601E		60	Steel emergency exit light

Product Code	Pictogram	Viewing Distance (m)	Compatible Product Groups
PBVEX601E1		60	Steel emergency exit light
PBVEX601E2		60	Steel emergency exit light
PBVEX602E	 	60	Steel emergency exit light
PBVEX602E3		60	Steel emergency exit light
PBVEX605E	 	60	Steel emergency exit light
PBVEX605E3		60	Steel emergency exit light

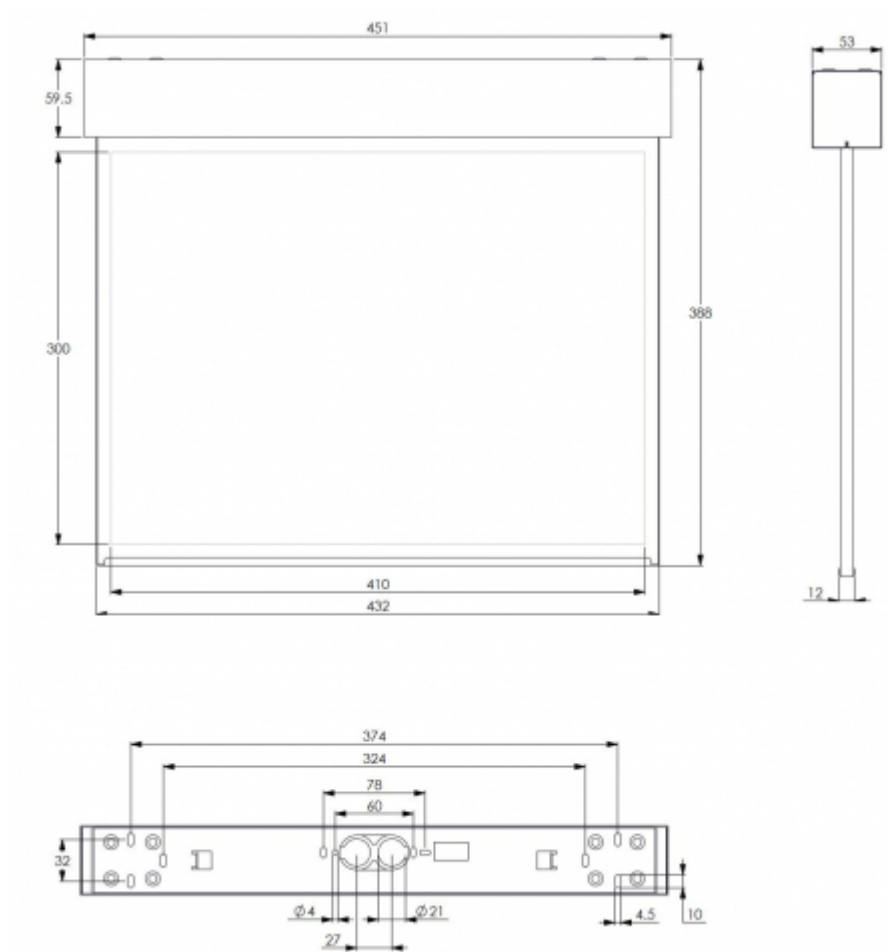

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 05, 2024 | Source: www.teknoware.fi/en/steel-emergency-exit-light-twte651wk

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

