


SILVER LED EMERGENCY EXIT LIGHT Y6651WK145

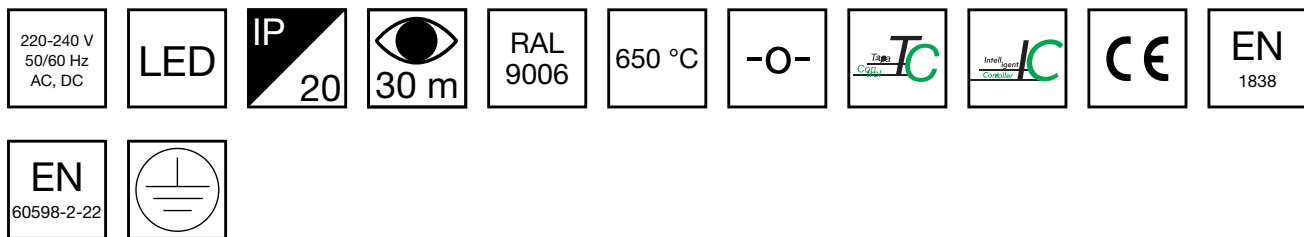

Addressable 230 V centrally supplied LED Emergency Exit Light with 2-sided pictogram, arrow down, 30 m viewing distance (Inividually packed TWT6651WK)

Teknoware's Silver LED exit lights have a metal body and are suitable for aesthetically demanding environments.

The 2-sided light plate of the Silver luminaires is silk screen printed and its body is made from bent sheet steel.

Product Code	Y6651WK145
Feature	Intelligent Controller, Tapsa Control
Mounting (standard)	flag
Customs Code	94056080
GTIN Code	6438045021225
ETIM Product Class	EC001957
Length	295 mm
Width	420 mm
Height	115 mm
Weight	1,8 kg
Max Input Power VA	10,4 VA
Max Input Power W	6,5 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC
Protection Class	I
IP Class	IP20
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	30 m
Light Source	LED
Body Material	metal
Colour	RAL9006
Electrical Installation	3 x 2,5 mm ²

OPTIONAL ACCESSORIES:

COVER LABELS FOR EMERGENCY EXIT LIGHTS




Product Code	Pictogram	Compatible Product Groups
XWT7000		Silver Emergency Exit Lights

SPARE PARTS:

SPARE PARTS FOR EMERGENCY LIGHTS



Product Code	Product Name	Compatible Product Groups
W100001	Ballast W100001	Addressable 230 V Centrally Supplied Emergency Lights, Addressable 230 V Centrally Supplied Emergency Exit Lights

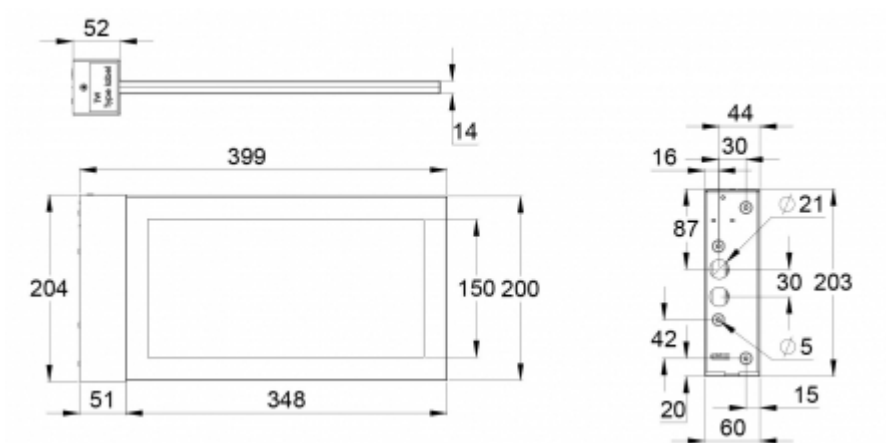

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 08, 2024 | Source:

www.teknoware.fi/en/emergency-lighting/silver-led-emergency-exit-light-y6651wk145

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

