
## ESC 80 DIMMED EMERGENCY EXIT LIGHT TWS8092WAR





## Dimmed self-contained emergency exit light with 1 h super capacitor and wireless central monitoring

ESC 80 is an emergency exit light equipped with a light plate, combining cutting edge technology combined with modern luminaire design. ESC 80 TWS8092WAR is dimmed to prevent disturbing light of the exit sign in dark environment. Thanks to Teknoware's innovative electronics and product design, the ESC 80 luminaire combines uniformly illuminated pictograms, low power consumption, as well as a slender appearance.

There is a selection of three different luminaire sizes. ESC 80 luminaires can be used as 1 or 2 sided, as well as recess or surface mounted.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 05, 2024 | Source: www.teknoware.fi/en/esc-80-dimmed-emergency-exit-light-tws8092war



ESC 80 is particularly easy and fast to install thanks to a separate mounting piece, into which also the power supply is connected.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 05, 2024 | Source: www.teknoware.fi/en/esc-80-dimmed-emergency-exit-light-tws8092war



| Product Code                        | TWS8092WAR                      |
|-------------------------------------|---------------------------------|
| Feature                             | Aalto Control, Escap, Lumi Test |
| Mounting (standard)                 | wall, ceiling                   |
| Mounting (optional)                 | recess, flag, pendel            |
| Customs Code                        | 94056080                        |
| GTIN Code                           | 6438045027128                   |
| ETIM Product Class                  | EC001957                        |
| Length                              | 268 mm                          |
| Width                               | 40 mm                           |
| Height                              | 185 mm                          |
| Weight                              | 0,74 kg                         |
| Backup                              | 1 h                             |
| Max Input Power VA                  | 2,4 VA                          |
| Max Input Power W                   | 2 W                             |
| Nominal Supply Voltage              | 220-240 V, 50/60 Hz AC          |
| Protection Class                    | II                              |
| IP Class                            | IP44                            |
| Temperature Range Min - Max         | -25+35 °C                       |
| Glow Wire Test of Plastic Materials | 650 °C                          |
| Viewing Distance                    | 20/26/30 m                      |
| Light Source                        | LED                             |
| Body Material                       | plastic                         |
| Aperture for Recess Mounting        | 45 x 275 mm                     |
| Colour                              | RAL9003                         |
| Electrical Installation             | 2/3 x 2,5 mm <sup>2</sup>       |

## ONE OR MORE OF THESE IS ALSO REQUIRED:

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 05, 2024 | Source: www.teknoware.fi/en/esc-80-dimmed-emergency-exit-light-tws8092war



## PICTOGRAMS FOR EMERGENCY EXIT LIGHTS




We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 05, 2024 | Source: www.teknoware.fi/en/esc-80-dimmed-emergency-exit-light-tws8092war



| Product Code | Pictogram             | Viewing Distance (m) | Compatible Product Groups    |
|--------------|-----------------------|----------------------|------------------------------|
| PBV80202E    | <u>S</u> ↓ <u>S</u> ↓ | 20                   | ESC 80 Emergency Exit Lights |
| PBV80202E3   | ₩                     | 20                   | ESC 80 Emergency Exit Lights |
| PBV80201E    | §→ < 2                | 20                   | ESC 80 Emergency Exit Lights |
| PBV80201E1   | <u>∑</u> →            | 20                   | ESC 80 Emergency Exit Lights |
| PBV80201E2   | € 2                   | 20                   | ESC 80 Emergency Exit Lights |
| PBV80262E    | <u>∑</u> ↓ <u>∑</u> ↓ | 26                   | ESC 80 Emergency Exit Lights |
| PBV80262E3   | <u>₹</u> ↓            | 26                   | ESC 80 Emergency Exit Lights |
| PBV80261E    | <u>S</u> → € 2        | 26                   | ESC 80 Emergency Exit Lights |
| PBV80261E1   | <u>∑</u> →            | 26                   | ESC 80 Emergency Exit Lights |
| PBV80261E2   | € 2                   | 26                   | ESC 80 Emergency Exit Lights |
| PBV80302E    | <u>₹</u> ↓ <u>₹</u> ↓ | 30                   | ESC 80 Emergency Exit Lights |
| PBV80302E3   | <u>₹</u> <b>↓</b>     | 30                   | ESC 80 Emergency Exit Lights |
| PBV80301E    | S → < 2               | 30                   | ESC 80 Emergency Exit Lights |
| PBV80301E1   | <u>∑</u> →            | 30                   | ESC 80 Emergency Exit Lights |
| PBV80301E2   | ← 🔁                   | 30                   | ESC 80 Emergency Exit Lights |

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 05, 2024 | Source: www.teknoware.fi/en/esc-80-dimmed-emergency-exit-light-tws8092war



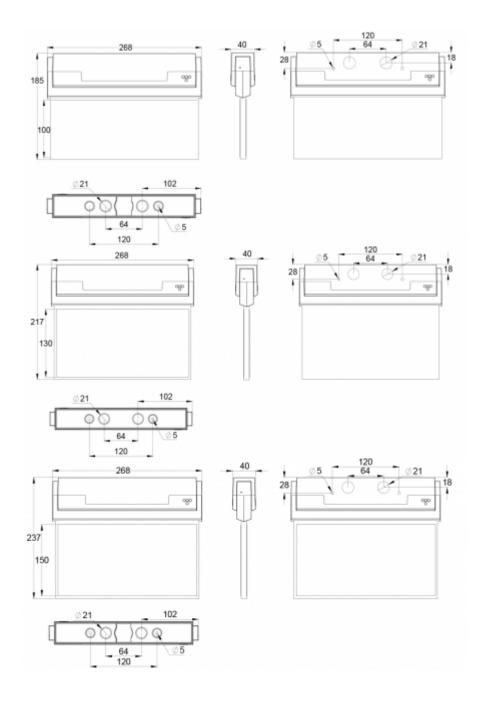

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 05, 2024 | Source: www.teknoware.fi/en/esc-80-dimmed-emergency-exit-light-tws8092war

